

09/762228

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE
REQUEST FOR FILING NATIONAL PHASE OF
PCT APPLICATION UNDER 35 U.S.C. 371 AND 37 CFR 1.494 OR 1.495

To: Hon. Commissioner of Patents
 Washington, D.C. 20231



00909

TRANSMITTAL LETTER TO THE UNITED STATES
 DESIGNATED/ELECTED OFFICE (DO/EO/US)

Atty Dkt: PM 276588 /2980383US/A/KP
M# /Client Ref.

From: Pillsbury Winthrop LLP, IP Group:

Date: February 5, 2001

This is a **REQUEST** for **FILING** a PCT/USA National Phase Application based on:

1. International Application <u>PCT/FI99/00660</u> <u>FI</u> country code	2. International Filing Date <u>9</u> <u>August</u> <u>1999</u> Day MONTH Year	3. Earliest Priority Date Claimed <u>10</u> <u>August</u> <u>1998</u> Day MONTH Year (use item 2 if no earlier priority)
---	--	---

4. Measured from the earliest priority date in item 3, this PCT/USA National Phase Application Request is being filed within:

(a) ☐ 20 months from above item 3 date (b) ☒ 30 months from above item 3 date,

(c) Therefore, the due date (unextendable) is February 10, 2001

5. Title of Invention DATA TRANSMISSION A TELECOMMUNICATION SYSTEM

6. Inventor(s) RASANEN, Juha

Applicant herewith submits the following under 35 U.S.C. 371 to effect filing:

7. ☒ Please immediately start national examination procedures (35 U.S.C. 371 (f)).

8. ☐ A copy of the International Application as filed (35 U.S.C. 371(c)(2)) is transmitted herewith (file if in English but, if in foreign language, file only if not transmitted to PTO by the International Bureau) including:

a. ☐ Request;

b. ☐ Abstract;

c. pgs. Spec. and Claims;

d. sheet(s) Drawing which are ☐ informal ☐ formal of size ☐ A4 ☐ 11"

9. ☒ A copy of the International Application has been transmitted by the International Bureau.

10. A translation of the International Application into English (35 U.S.C. 371(c)(2))

a. ☒ is transmitted herewith including: (1) ☒ Request; (2) ☒ Abstract;

(3) 18 pgs. Spec. and Claims;

(4) 2 sheet(s) Drawing which are:

☐ informal ☒ formal of size ☒ A4 ☐ 11"

b. ☐ is not required, as the application was filed in English.

c. ☐ is not herewith, but will be filed when required by the forthcoming PTO Missing Requirements Notice per Rule 494(c) if box 4(a) is X'd or Rule 495(c) if box 4(b) is X'd.

d. ☐ Translation verification attached (not required now).

11. ☒ **PLEASE AMEND** the specification before its first line by inserting as a separate paragraph:
- a. ☒ --This application is the national phase of international application PCT/FI99/00660 filed August 9, 1999 which designated the U.S.--
- b. ☐ --This application also claims the benefit of U.S. Provisional Application No. 60/_____, filed _____--
12. ☐ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3)), i.e., **before 18th month from first priority date above in item 3, are transmitted herewith (file only if in English) including:**
13. ☒ PCT Article 19 claim amendments (if any) have been transmitted by the International Bureau
14. ☐ Translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)), i.e., of **claim amendments made before 18th month, is attached (required by 20th month from the date in item 3 if box 4(a) above is X'd, or 30th month if box 4(b) is X'd, or else amendments will be considered canceled).**
15. **A declaration of the inventor (35 U.S.C. 371(c)(4))**
- a. ☒ is submitted herewith ☒ Original ☐ Facsimile/Copy
- b. ☐ is not herewith, but will be filed when required by the forthcoming PTO Missing Requirements Notice per Rule 494(c) if box 4(a) is X'd or Rule 495(c) if box 4(b) is X'd.
16. **An International Search Report (ISR):**
- a. Was prepared by ☐ European Patent Office ☐ Japanese Patent Office ☒ Other
- b. ☒ has been transmitted by the international Bureau to PTO.
- c. ☒ copy herewith (1 pg(s).) ☒ plus Annex of family members (1 pg(s).).
17. **International Preliminary Examination Report (IPER):**
- a. ☒ has been transmitted (if this letter is filed after 28 months from date in item 3) in English by the International Bureau with Annexes (if any) in original language.
- b. ☒ copy herewith in English.
- c.1 ☐ IPER Annex(es) in original language ("Annexes" are amendments made to claims/spec/drawings during Examination) including attached amended:
- c.2 ☐ Specification/claim pages # _____ claims # _____
- Dwg Sheets # _____
- d. ☐ Translation of Annex(es) to IPER **(required by 30th month due date, or else annexed amendments will be considered canceled).**
18. **Information Disclosure Statement** including:
- a. ☒ Attached Form PTO-1449 listing documents
- b. ☒ Attached copies of documents listed on Form PTO-1449
- c. ☒ A concise explanation of relevance of ISR references is given in the ISR.
19. ☒ **Assignment** document and Cover Sheet for recording are attached. Please mail the recorded assignment document back to the person whose signature, name and address appear at the end of this letter.
20. ☐ Copy of Power to IA agent.
21. ☐ **Drawings** (complete only if 8d or 10a(4) not completed): ____ sheet(s) per set: ☐ 1 set informal; ☐ Formal of size ☐ A4 ☐ 11"
22. Small Entity Status ☐ is **Not** claimed ☐ is claimed (pre-filing confirmation required)
- 22(a) _____ (No.) Small Entity Statement(s) enclosed (since 9/8/00 Small Entity Statements(s) not essential to make claim)
23. **Priority** is hereby claimed under 35 U.S.C. 119/365 based on the priority claim and the certified copy, both filed in the International Application during the international stage based on the filing in (country) FINLAND of:
- | | <u>Application No.</u> | <u>Filing Date</u> | | <u>Application No.</u> | <u>Filing Date</u> |
|-----|------------------------|------------------------|-----|------------------------|--------------------|
| (1) | <u>981723</u> | <u>August 10, 1998</u> | (2) | _____ | _____ |
| (3) | _____ | _____ | (4) | _____ | _____ |
| (5) | _____ | _____ | (6) | _____ | _____ |
- a. ☒ See Form PCT/IB/304 sent to US/DO with copy of priority documents. If copy has not been received, please proceed promptly to obtain same from the IB.
- b. ☐ Copy of Form PCT/IB/304 attached.

RE: USA National Filing of PCT/FI99/00660

JC05 Rec'd PCT/PTO 05 FEB 2001

24. Attached: Copy of Finnish OA

25. Preliminary Amendment: ATTACHED

25.5 Per Item 17.c2, cancel original pages #____, claims #____, Drawing Sheets #**26. Calculation of the U.S. National Fee (35 U.S.C. 371 (c)(1)) and other fees is as follows:**Based on amended claim(s) per above item(s) ☐ 12, ☐ 14, ☐ 17, ☒ 25, ☐ 25.5 (hilit)

Total Effective Claims	15	minus 20 =	0	x \$18/\$9	=	\$0	966/967
Independent Claims	2	minus 3 =	0	x \$80/\$40	=	\$0	964/965
If any proper (ignore improper) Multiple Dependent claim is present,				add \$270/\$135	+	0	968/969

BASIC NATIONAL FEE (37 CFR 1.492(a)(1)-(4)): →→ **BASIC FEE REQUIRED, NOW** →→→→A. If country code letters in item 1 are not "US", "BR", "BB", "TT", "MX", "IL", "NZ", "IN" or "ZA"

See item 16 re:

1. Search Report was <u>not</u> prepared by EPO or JPO	-----	add \$1000/\$500		960/961
2. Search Report was prepared by EPO or JPO	-----	add \$860/\$430	+1000	970/971

SKIP B, C, D AND E UNLESS country code letters in item 1 are "US", "BR", "BB", "TT", "MX", "IL", "NZ", "IN" or "ZA"

(X) <input type="checkbox"/> B. If USPTO did not issue <u>both</u> International Search Report (ISR) <u>and</u> (if box 4(b) above is X'd) the International Examination Report (IPER),	-----	add \$970/\$485	+0	960/961
(only) <input type="checkbox"/> C. If USPTO issued ISR but not IPER (or box 4(a) above is X'd),	-----	add \$710/\$355	+0	958/959
(one) <input type="checkbox"/> D. If USPTO issued IPER but IPER Sec. V boxes <u>not all</u> 3 YES,	-----	add \$690/\$345	+0	956/957
(of) <input type="checkbox"/> E. If international preliminary examination fee was paid to USPTO and Rules 492(a)(4) and 496(b) <u>satisfied</u> (IPER Sec. V <u>all</u> 3 boxes YES for <u>all</u> claims),	-----	add \$100/\$50	+0	962/963

27. **SUBTOTAL =** \$100028. If Assignment box 19 above is X'd, add Assignment Recording fee of ---\$40 +40 (581)29. Attached is a check to cover the ----- **TOTAL FEES** \$1040

Our Deposit Account No. 03-3975

Our Order No. 60258 | 276588
C# M#

00909

CHARGE STATEMENT: The Commissioner is hereby authorized to charge any fee specifically authorized hereafter, or any missing or insufficient fee(s) filed, or asserted to be filed, or which should have been filed herewith or concerning any paper filed hereafter, and which may be required under Rules 16-18 and 492 (missing or insufficient fee only) now or hereafter relative to this application and the resulting Official document under Rule 20, or credit any overpayment, to our Account/Order Nos. shown above for which purpose a duplicate copy of this sheet is attached.

This CHARGE STATEMENT does not authorize charge of the issue fee until/unless an issue fee transmittal form is filedPillsbury Winthrop LLP
Intellectual Property GroupBy Atty: Richard C. IrvingReg. No. 38499Sig: Richard C. IrvingFax: (202) 822-0944
Tel: (202) 861-3788

Atty/Sec: RCI/mhn

NOTE: File in duplicate with 2 postcard receipts (PAT-103) & attachments.

09/762228

IN THE UNITED STATES PATENT OFFICE

JC05 Rec'd PCT/PTO 05 FEB 2001

In re PATENT APPLICATION of

RASANEN, Juha

Atty Dkt.: 276588/2980383US/A/KP

Appln. No.:

Group Art Unit:

Filed: HERewith

Examiner:

Title: DATA TRANSMISSION IN A TELECOMMUNICATION SYSTEM

* * * * *

Date February 5, 2001

PRELIMINARY AMENDMENT

Hon. Commissioner of Patents
and Trademarks Office
Washington, D.C. 20231

Sir:

Please amend this application as follows:

IN THE CLAIMS:

Claim 3, line 1, delete " or 2 "

Claim 4, line 1, delete " 2 or 2, "

Claims 6 & 7, line 1, delete " 2, 3 or 4, "

Claims 10 & 11, line 1, change " any one of the
preceding claims " to - - claim 1 - -

RASANEN

Claims 14 & 15, line 1, delete " 13 or 14 "

Respectfully submitted,

PILLSBURY WINTHROP LLP

By Richard C. Irving
Richard C. Irving
Reg. No. 38,499
Tel. No.: (202) 861-3788
Fax No.: (202) 822-0944

RCI/mhn
1100 New York Avenue, N.W.
Ninth Floor
Washington, D.C. 20005-3918
(202) 861-3000

DATA TRANSMISSION IN A TELECOMMUNICATION SYSTEM

The invention relates to data transmission in a telecommunication system.

In mobile communication systems, the data transmission capacity
5 available at the radio interface is divided among a plurality of users by a multiple access principle. The most common multiple access principles include time division multiple access (TDMA), code division multiple access (CDMA), and frequency division multiple access (FDMA). In TDMA systems, communication on the radio path is time divided and occurs in successive repetitive
10 TDMA frames, each of which comprises a plurality of timeslots. In each timeslot, a short information packet is sent as a finite radio frequency burst composed of a group of modulated bits. Timeslots are mainly used to transmit control channels and traffic channels. Speech and data are transmitted on traffic channels. Control channels are used for signalling between a base station and mobile stations. An example of a TDMA radio system is the pan-European mobile communication system GSM (Global System for Mobile Communications).

In the CDMA system, in turn, a traffic channel is defined by a unique spreading code assigned to a mobile station, whereas in the FDMA
20 system, a traffic channel is defined by a radio channel.

The maximum data transfer rate on a traffic channel is relatively low, as it is limited by the available bandwidth and the channel and error codings used in the transmission. For instance in the GSM system (Global System for Mobile Communications), the user data rate in a traffic channel using
25 one timeslot was restricted to 9.6 kbit/s according to the original specifications, the radio interface rate being 12 kbit/s. This was found to be insufficient for many new teleservices, such as telefax, video image transfer, etc. This is why high-speed data transmission services based on what is known as a multiple channel technique are being introduced into new mobile communication systems. In the multiple channel technique, a mobile station is offered a higher bit rate and a wider bandwidth in the form of a plurality of parallel basic traffic channels (e.g. several timeslots). For instance in the GSM mobile communication system, a high-speed data service HSCSD (High Speed Circuit Switch Data) is defined in the ETSI (European Telecommunications Standards Institute)
35 recommendations GSM 01.34, GSM 02.34 and GSM 03.34. In the HSCSD concept, a high-speed data signal is divided into separate data

streams which are then transmitted via N sub-channels (N traffic channel/timeslots) at the radio interface, and similarly, in N sub-channels between a base station and a mobile switching centre (transcoder). Once the data streams are divided, they are carried in the sub-channels as if they were not
5 interdependent, until they are again combined at the receiving end. However, logically these N sub-traffic channels belong to the same HSCSD link, i.e. they form one HSCSD traffic channel. The capacity of an HSCSD is thus as much as eight-fold with respect to the capacity of a basic traffic channel, and this leads to a significantly improved data transmission rate. At the radio interface,
10 the GSM-HSCSD is able to support a radio interface rate of 96 kbit/s (8×12 kbit/s) and user rates of 76.8 kbit/s (8×9.6 kbit/s).

Digital mobile communication systems, particularly TDMA-based systems, such as GSM, employ radio system timing to synchronize data transmission over the air interface. For instance in the GSM, a basic timing
15 unit is 20 milliseconds (ms). In a transparent circuit-switched data call, said 20-ms unit corresponds to four V.110 frames (in cases involving TCH/F9.6 or TCH/F4.8 or TCH/F2.4 channel coding) or one E-TRAU frame (in cases involving TCH/F14.4 channel coding). In a non-transparent call, said 20-ms unit corresponds to one radio link protocol (RLP) frame (in cases involving
20 TCH/F9.6 or TCH/F4.8 or TCH/F2.4 channel coding) or one half of an RLP frame (in cases involving TCH/F14.4 channel coding). In the latter case, the halves of the RLP frame are separated by an indication bit.

The above-mentioned TCH/F14.4 channel coding was introduced into the GSM system later, when higher data transfer rates were needed. In
25 non-transparent calls, TCH/F14.4 channel coding requires a new RLP protocol version since said 20-ms basic timing unit included more bits than previously and was therefore not compatible with the RLP frame length or its multiple. TCH/F14.4 also produced a rather rough remapping procedure, enabling swapping between TCH/F14.4 and TCH/F9.6 channel coding during a data
30 call. A reason for said swapping function is e.g. connection optimization after a change in radio link quality, or handover between two cells, one of which supports TCH/F14.4 channel coding and the other not. For a transparent 14.4 kbit/s call, the new TCH/F14.4 channel coding provided an extremely well optimized rate adaptation: a 14.5 kbit/s radio interface rate, of which 14.4 kbit/s
35 is user data, adapted to the new number of bits in the 20-ms basic timing.

If new channel codings are introduced into the GSM, the same

problem again arises as in TCH/F14.4: each channel coding has a different number of bits in one basic 20-ms timing unit. Some channel codings may produce a number of bits which is compatible with current rate adaptation frames or multiples of RLP frames, other channel codings may produce a number of bits requiring new RLP versions or new rate adaptation methods, whereas some channel codings may produce a number of bits which supports the use of current rate adaptation methods only very inefficiently, that is, with significant overhead.

Furthermore, the ETSI EDGE project (Enhanced Data Rates for GSM Evolution) is developing a new modulation method offering a higher data transfer rate per timeslot than the present GMSK modulation, but maintaining the 200-khz channel spacing and the TDMA frame structure. This allows the present HSCSD data services to be supported by a smaller number of timeslots. In addition, the new modulation allows the production of new data services having as high as a 64 kbit/s data transfer rate per timeslot or over 64 kbit/s ($n \cdot 64$ kbit/s) in a multiple timeslot constellation. The radio interface rate is either 28.8 kbit/s or 38.4 kbit/s. New channel codings causing the above problems are also produced with the new modulation method.

Similar problems arise also in other digital mobile communication systems and generally in telecommunication systems.

Consequently, there is a need for a general method for adapting fixed-length transmission frames to a timing unit (block) having any number of bits in a transmission channel, i.e. the same transmission frames can be sent through the system by different channel codings, avoiding the definition of new rate adaptations, link protocols and remapping procedures, and at the same time optimizing the efficiency of coding (overhead minimized).

The object of the invention is a method and system eliminating the above problems and achieving the objects.

This is achieved by the method of claim 1 and the mobile communication system of claim 12.

In the invention, an information unit is asynchronously transmitted over a transmission link, such as a radio interface, in the basic timing units of the transmission link (such as a radio interface) called radio frames herein, in the case of a radio interface. The information units are placed in two or more successive radio frames in such a way that each radio frame contains at least one whole information unit and part of an information unit which is split in two

successive radio frames. This way the radio frames may be considered to contain asynchronous information units. One or more bits in a radio frame are reserved for phase indication, on the basis of which a receiver synchronizes to the asynchronous information units within the radio frames. The phase indication is modulo N determining the sequence of N successive radio frames and indicating for each radio frame which of the N possible radio frames in the frame sequence said frame is. The transmitting unit packs the information units into radio frames and provides the radio frames with the above phase indication. As many whole information units as possible (at least one) are packed in the last radio frame of the frame sequence, and the end of the last radio frame is filled with filler bits, if required. This is usually required since the number of bits required by the information units packed in the frame sequence and by said phase indication is smaller than the total number of information bits in the frame sequence. This is typically the case in the primary application areas of the invention, i.e. when the length of the information field of a radio frame is not the length or a multiple of the information unit to be transmitted. Filler bits can be located in the frame sequence in other locations than at the end of the last radio frame. The receiving unit indicates phasing between the radio frames and the asynchronous information units in the radio frames by synchronizing with said phase indication. In other words, the receiving unit detects from the phase indication where the start of the frame sequence and the start of each whole information unit in the radio frame is, and separates the information units from the radio frames for further processing. The receiving unit rejects any filler bits.

An information unit may be any protocol unit or frame or information element which is to be transmitted over the radio interface. It may be a transmission frame or a part thereof (contents) used in data transmission between a network element, such as a base station, and a network adapter in a radio access network, for example, such as A-TRAU or E-TRAU frames in the GSM system. The information unit may also be a protocol data unit of an upper protocol. An example of this is a protocol data unit, such as a radio link protocol (RLP) frame in the GSM system, of a link protocol established between a mobile station and a network adapter. The invention allows the same fixed-length information unit to be arranged in a radio frame having any number of bits, i.e. the same information units may be transmitted through the radio interface of the radio system with different channel codings. The only thing re-

quired is the selection of a suitable value for the N modulo N sequence and a suitable number of filler bits for each different radio frame type or channel coding. In other words, a radio system may have a dedicated modulo N sequence for different data transfer rates and channel codings. The invention
5 allows the radio system to use the same information unit in different channel codings. The present invention may be applied to the transmission of current RLP frames and transparent rate adaptation frames through new EDGE channel codings, avoiding the need to determine new RLP versions, rate adaptation methods and remapping procedures.

10 The invention optimizes the efficiency of channel coding, since it causes very slight overhead in the system. Typically, phase indication reserves one bit or only some bits in a radio frame. Phase indication may be for example a pseudo-noise (PN) code spread over N radio frames. This is extremely efficient, since only one bit is needed in each radio frame. For example
15 in the case of a 31-bit PN code, the maximum modulo sequence of the radio frames is 31 frames and the receiver has to receive five radio frames in order to synchronize to the sequence, i.e. to lock to the right phase, in order for the receiver to know which of the 31 frames is involved and, accordingly, where the starts of the information units are in each radio frame. If a radio
20 frame has enough bits available for phase indication, phase indication may be for example a sequence number (0, 1, 2, 3...). In this case the receiver only has to receive one radio frame in order to synchronize to the frame sequence. Furthermore, if there are enough bits, phase indication may be coded to protect it against transmission errors which may occur in transmission over the
25 radio path.

The invention will be described in more detail in connection with preferred embodiments with reference to the attached drawings, in which

Figures 1A and 1B show a protocol structure for transparent and non-transparent traffic channels TCH/F4.8 and TCH/F9.6 in the GSM system,

30 Figure 2 shows Abis interface protocols for a traffic channel TCH/F14.4,

Figure 3 illustrates the channel configuration required by a 38.4 kbit/s EDGE traffic channel in the GSM,

35 Figure 4 shows a Modulo N radio frame sequence according to the invention,

Figure 5A illustrates downlink E-TRAU frames,

Figures 5B and 6A illustrate the radio frame sequence of the invention for a 38.4 kbit/s EDGE traffic channel,

Figure 6B illustrates an information unit sequence which a mobile station separates from radio frames received.

5 The present invention may be applied in all digital telecommunication systems, and particularly in wireless telecommunication systems, such as cellular systems, WLL (Wireless Local Loop) and RLL (Radio Local Loop) type of networks, satellite-based mobile communication systems, etc., for the addition of a new high-speed traffic channel to the radio interface without any
10 need to define new speed adaptations for transmission links. Herein the term mobile communication system (or network) refers generally to all wireless telecommunication systems. There are a plurality of multiple access modulation techniques which facilitate communication involving a large number of mobile users. These techniques include time division multiple access (TDMA),
15 code division multiple access (CDMA) and frequency division multiple access (FDMA). The physical concept of a traffic channel varies in different multiple access systems, being primarily defined by means of a time slot in TDMA systems, by a spreading code in CDMA systems, by a radio channel in FDMA systems, a combination thereof, etc. The basic idea of the present invention is
20 independent of the type of traffic channel and the multiple access methods used.

 The primary application area of the invention is the addition of an EDGE radio interface to the GSM system or a corresponding change in other GSM-based systems, such as the DCS1800 (Digital Communication System),
25 the US digital cellular system PSC (Personal Communication System), and WLL systems based on the above systems. The invention will be described by using the GSM mobile communication system as an example. The structure and operation of the GSM system are well known to persons skilled in the art and are defined in the ETSI (European Telecommunications Standards Institute) GSM specifications. A further reference is made to the publication *GSM System for Mobile Communication*, M. Mouly and M. Pautet, Palaiseau, France, 1992; ISBN: 2-9507190-0-7.
30

 The basic structure of the GSM system comprises two parts: a base station system BSS and a network sub-system (NSS). The BSS and mobile stations MS communicate via radio links. A base station BTS serves each cell
35 in the base station system BSS. A number of base stations are connected to a

base station controller BSC, which controls the radio frequencies and channels the BTS uses. The BSCs are connected to a mobile services switching centre MSC. In addition, at least two data bases exist, a home location register HLR and a visitor location register VLR.

5 A mobile communication system typically comprises adapter functions for adapting the internal data link of the mobile communication network to the protocols used by the terminals and other telecommunication networks. Typical adapter functions include a terminal adaptation function (TAF) at the interface between a mobile station and a data terminal connected thereto, and
10 a network adapter IWF (InterWorking Function) at the interface between the mobile communication network and a second telecommunication network, usually in connection with a mobile switching centre. A mobile switching centre usually has several types of adapter equipment pools for supporting different data services and protocols, e.g. a modem pool comprising modems and
15 telefax adapters for modem and telefax services, a UDI/RDI speed adapter pool, etc. In the GSM system, a data link is established between the network terminal TAF of a mobile station MS and a network adapter IWF in the mobile communication system. The TAF adapts the data terminal DTE connected to the mobile station MS to said GSM data link which is set up over a physical
20 connection using one or more traffic channels. The IWF connects the GSM data link to another network, such as the ISDN or a second GSM network, or the public telephone network PSTN.

As was explained above, modern mobile communication systems support different teleservices and network services. Network services are
25 usually divided into groups according to a property, e.g. asynchronous network services and synchronous network services. Each group comprises a number of network services, such as transparent service (T) and non-transparent service (NT). In transparent service, the data to be transmitted is not structured and transmission errors are corrected only by channel coding. In
30 non-transparent service, the data to be transmitted is structured into protocol data units (PDU) and transmission errors are corrected by using (in addition to channel coding) automatic retransmission protocols.

Figure 1A shows an example of protocols and functions needed in the IWF (either in the MSC or a WLL-specific network element) for transparent
35 network services. The transparent circuit-switched connection between the terminal adapter TAF and the network adapter IWF in a GSM traffic channel

comprises a plurality of protocol layers which are common to all these services. These include different rate adaptation functions (RA), such as RA1' between a terminal adapter TAF and a CCU unit (Channel Codec Unit) in the base station system BSS, RA1 between a CCU unit and a network adapter IWF, RAA between a CCU unit and a transcoder unit TRAU which is separate from the base station, and RA2 between a transcoder unit TRAU and a network adapter IWF. The rate adaptation functions RA are defined in GSM recommendations 04.21 and 08.20. Traffic between a CCU unit and a transcoder unit TRAU is defined in GSM recommendation 08.60. At the radio interface, RA1' rate adapted information is also channel coded in a manner defined by GSM recommendation 5.03; blocks FEC illustrate this in a mobile station MS and a CCU unit. The IWF and the TAF also comprise upper layer protocols, which are service-specific. In the asynchronous transparent network service of Figure 1A, the IWF requires an asynchronous/synchronous conversion of RA0 and a modem or a rate adapter towards the fixed network. A transparent signal propagates through a traffic channel between the terminal interface and the PSTN/ISDN. A transparent synchronous configuration is otherwise similar, but does not have the rate adaptation RA0.

Referring to Figure 1B, in asynchronous non-transparent network service, the IWF and MS comprise, instead of RA0, L2R (Layer 2 Relay) and RLP (Radio Link Protocol) protocols. The L2R functionality for non-transparent character-oriented protocols is defined in GSM recommendation 07.02, for example. The RLP protocol is defined in GSM recommendation 04.22. The RLP is a frame-structured, balanced (HDLC type) data transmission protocol in which error correction is based on retransmission of distorted frames at the request of the receiving party. The interface between the IWF and an audio-modem MODEM, for example, conforms to CCITT V.24, and is denoted by symbol L2 in Figure 1B. This non-transparent configuration is also used when accessing the Internet.

Figures 1A and 1B relate to a network configuration in which a transcoder and some rate adaptations are located outside the base station BTS in what is known as a remote transcoder TRAU. In this case the transcoder is considered to be a functional part of the BSC. Physically the TRAU may be located either in the BSC or the MSC. The interface between the transcoder unit TRAU and the base station BTS is called the Abis interface. The Abis interface comprises 16 kbit/s traffic channels, four of which can be

transmitted in one standard 64 kbit/s channel. Information is transmitted between a channel codec unit CCU and a transcoder unit TRAU in fixed-length frames, called TRAU frames. Both speech/data and control signals associated with the transcoder TRAU are transmitted in these frames. In the case of 4.8 kbit/s (TCH/F4.8) and 9.6 kbit/s (TCH/F9.6) channel coding, when data is adapted into TRAU frames, the rate adaptation function RA1/RAA is required in addition to the other rate adaptations. When channel coding is 14.4 kbit/s (TCH/F14.4), a slightly different rate adaptation function, RA1'/RAA', is required, as Figure 3 illustrates. RA1'/RAA' converts the radio frames (blocks) into E-TRAU format and vice versa. The RAA' function converts an E-TRAU frame into an A-TRAU frame and vice versa. Since the rate adaptation defined for TCH/F14.4 channel coding is also probably the best alternative for traffic channels at the EDGE radio interface, the primary embodiment of the invention will be described implemented thereby. However, it should be noted that the invention may also be implemented by other rate adaptations, such as RA1/RAA.

In the HSCSD concept of the GSM system, a high-speed data signal is divided into separate data streams which are then transmitted through an N sub-channel (N traffic channel/timeslots) at the radio interface and through an N transmission channel (16 kbit/s) between BTS/IWF. Once the data streams are divided, they are carried in the sub-channels as if they were not interdependent, until they are again combined in the IWF or the MS. However, logically these N sub-traffic channels belong to the same HSCSD link, i.e. they form one HSCSD traffic channel. According to the GSM recommendations, a data stream is divided and combined in a modified RA0 or RLP, which is hence common to all sub-channels. Underneath this common RA0 or RLP, each sub-channel has separately the same protocol stack RA1'-FEC-FEC-RA1'-RAA-RAA-RA2-RA2-RA1 or RA1'-FEC-FEC-RA1'-RAA'-RAA'-RA2-RA2-RA1, which is shown in Figures 1A and 1B for one traffic channel between MS/TAF and MSC/IWF. In transparent data transmission between TAF/IWF, traffic channels are numbered to maintain the order of the data. In addition, inside a traffic channel, multiframing is used to increase the tolerance against transmission delay errors between traffic channels. Channel and frame numbering is carried as inband signalling.

When attempts are made to support the EDGE radio interface rate 38.4 kbit/s by current channel structures and TCH/F1.4 rate adaptations be-

tween BTS/IWF, the result is a configuration according to Figure 3. The EDGE channel 38.4 kbit/s requires three parallel 14.4 kbit/s channels between MS and MSC/IWF. When a 38.4 kbit/s EDGE channel is used, total transmission rates at the radio interface and the network interface are not equal. Furthermore, a new channel coding is required at the radio interface. This leads to the above problems associated with rate adaptations and RLP protocols and the efficiency of channel coding.

The following presents the inventor's analysis of some applications of the 38.4 kbit/s user rate, which could be alternatives to the present invention, and some problems associated therewith.

If TCH/F9.6 rate adaptation were used with V.110 frames, the radio interface rate would be 48 kbit/s because of the V.110 overhead. This would signify weak channel coding since the gross rate of the selected EDGE modulation method is 69.2 kbit/s. The radio interface rate should be as close as possible to the 38.4 kbit/s user rate to result in better channel coding.

The use of a more efficient A-TRAU or E-TRAU rate adaptation, defined for TCH/F14.4 channel coding (radio interface rate being 14.5 kbit/s), would support user data rates which are multiples of 14.4 kbit/s. This way a channel coding which would carry 3×14.5 kbit/s, i.e. 43.5 kbit/s, could be defined, corresponding to a user data rate of 43.2 kbit/s. However, this would still not be optimal in view of channel coding. In this approach, to achieve a (transparent) user data rate of exactly 38.4 kbit/s would require padding in radio frames.

A third way would be to define a suitable new rate adaptation and a new RLP version by new remapping operations to an optimized channel coding (at for example a 39 kbit/s radio interface rate). This would require much specification and implementation work. Furthermore, this is against EDGE standardization which aims at using current protocols with a minimal number of changes.

These problems can be avoided by the present invention whose basic principle is illustrated in Figure 4.

In the invention, radio frames are provided with phase indication $P_1 \dots P_n$ defining a sequence of N radio frames. In other words, in each frame, the phase indication $P_1 \dots P_n$ indicates which of the N possible frames in the frame sequence the frame concerned is. A transmitting unit packs the information units $I_1 \dots I_n$ in radio frames and provides the radio frames with the

above phase indication P. Typically, the length of an information unit is shorter than the length of the information field in a radio frame, whereby the number N of information units is also higher than the number of radio frames in N sequences. This way each radio frame contains at least one whole information unit I (such as information units I₁, I₂, I₄, I₆ and I_N) and part of an information unit split in two successive radio frames (such as I₅₁ and I₅₂, split from one whole information unit I₅ in two radio frames). As many whole information units as possible are packed in the last radio frame N of the frame sequence and the rest of the last radio frame is filled with filler bits FILL, if necessary. The modulo N radio frame sequence forms a kind of a multiframe in which phase indication P₁ acts as synchronization information.

In the following, a potential implementation of the 38.4 kbit/s user rate will be described as a primary embodiment, following the principles of the present invention and referring to Figures 5A, 5B, 6A and 6B. The new functionality introduced by the invention is located for instance in blocks RA1' and RA1'/RAA' in the mobile station MS and the base station BTS in Figures 1A, 1B and 2.

As was stated above with reference to Figure 3, a 38.4 kbit/s user rate can be carried in A-TRAU and E-TRAU frames defined for TCH/F14.4 channel coding between the network adapter MSC/IWF and the base station BTS using three Abis interface 16 kbit/s traffic channels, each of which has 14.4 kbit/s rate adaptation. For the rates of the radio interface and the transmission link to be compatible, every ninth A-TRAU and E-TRAU frame is a dummy frame. The PTS and IWF add the dummy frames in transmission and reject them in reception.

Figure 5A illustrates a group of nine E-TRAU frames, eight of which have information contents I₁...I₈ and one of which is a dummy frame DUMMY. In this case the corresponding user rate is $8/9 \cdot 3 \cdot 14.4 \text{ kbit/s} = 38.4 \text{ kbit/s}$, as was required. A corresponding information rate containing user data plus status and control etc. sent over the radio interface when operating with E-TRAU frames is $8/9 \cdot 3 \cdot 14.5 \text{ kbit/s} = 38.666... \text{ kbit/s}$. An E-TRAU frame contains 290 information bits (14500 bit/s:50). The header field H illustrates header, control, synchronization and other information associated with an E-TRAU frame.

Figure 5B illustrates downlink radio frames which the PTS sends over the radio interface to the mobile station MS. The header H generally rep-

resents all header, control, synchronization and other information in a radio frame. In addition to the header H, a radio frame must have enough bits for transmitting information payload. At least one bit of each 20-ms radio frame is required for the phase indication P1, P2 and P3 of the invention. This indicates a need for an at least 50-bit/s additional capacity. In other words, the required radio interface rate is at least $38.666 + 0.050 = 38.71666... \text{ kbit/s}$. This has to be rounded up in order to avoid the appearance of fractions of bits in a 20-ms radio frame. In this example, 38.800 kbit/s is chosen as the radio interface rate. A radio interface rate of 38.800 kbit/s corresponds to 776 information bits for each 20-ms radio frame ($38800 \text{ bit/s} : 50$). The relation of the number of information bits in a radio frame to the number of information bits in an E-TRAU frame is $776/290$. This is slightly more than $8/3$, i.e. three radio interface frames may carry the information of 8 E-TRAU frames and some extra bits.

In the exemplary case presented, a modulo 3 radio frame sequence, for example, would be efficient. In this case three radio frames carry $3 \cdot 776 = 2328$ bits. Similarly, 8 E-TRAU frames carry $8 \cdot 290 = 2320$ bits. Consequently, a sequence of three radio frames has eight extra bits for other purposes ($2328 - 2320$ bits). In the example of Figure 5B, a frame numbering in which two bits in each radio frame are used for frame indication, is selected as phase indication. Two bit locations in each sequence of three radio frames are extra and padding information has to be carried therein. In Figure 5B, these filler bits (e.g. 11) are placed at the end of the last frame.

This way a sequence of three radio frames according to Figure 5B is achieved, in which each frame contains phase indication $P1=00$, $P2=01$ and $P3=10$. The first radio frame contains the contents I_1 and I_2 of two whole E-TRAU frames and slightly more than two thirds I_{31} of E-TRAU frame I_3 . The rest I_{32} of the E-TRAU frame I_3 is placed in a second radio frame. In addition, the second radio frame contains the contents I_4 and I_5 of two whole E-TRAU frames and slightly more than a third of E-TRAU frame I_6 . The remaining two thirds I_{62} of E-TRAU frame I_6 are placed in a third radio frame. In addition, the third radio frame contains the contents I_7 and I_8 of two whole E-TRAU frames, and two filler bits. After this, a new modulo 3 radio frame sequence begins.

Figures 6A and 6B illustrate the downlink operation of a mobile station MS. The MS receives downlink radio frames (Figure 6A), which are identical to those in Figure 5B. Let us assume that the MS receives the first radio

frame in a frame sequence. The MS inspects the phase indication field P1 in the radio frame to find out which radio frame in the frame sequence is involved and thereby where the information units start in the radio frame. The starting points of the information units may be stored for each frame of the MS frame sequence, e.g. P1=00: the first unit in bit position 3, the second unit in bit position 293, the third unit in bit position 583, etc. Consequently, since P1=00, the MS knows that the first frame in the frame sequence is involved. Thereby the MS also knows that the 290 bits following the phase indication field P1 contain the first whole information unit I_1 , the following 290 bits contain the second whole information unit I_2 and the last 194 bits contain the third information unit. The MS then receives the following radio frame and analyzes the phase indication field P2. Since P2=01, the MS knows that the second radio frame of a modulo 3 frame sequence is involved. The MS then knows that the 96 bits following the phase indication field P2 contain part I_{32} of an information unit, which is to be combined with part I_{31} of the information unit received in the first radio frame. The MS carries out the combination and produces a whole information unit I_3 . The 580 bits following part I_{32} of the information unit contain a whole information unit I_4 and the following 290 bits contain a whole information unit I_5 . The last hundred bits of the second frame contain part I_{61} of an information unit. The MS then receives the third frame in the radio frame sequence and analyzes the phase indication field P3. Since P3=10, the MS knows that the third frame of the modulo 3 radio frame sequence is involved. In this case, the 190 bits immediately following the phase indication field P3 contain part I_{62} of the sixth information unit, which should be combined with part I_{61} received in the previous frame. The MS carries out the combination and produces a whole information unit I_6 . The following 580 bits contain the seventh and eight whole information units I_7 and I_8 . The MS rejects the last two bits of the radio frame, which are filler bits. This way the MS has restored a sequence of eight information units I_1 to I_8 for further processing. In normal operation, the next radio frame received by the mobile station MS is the first frame in the next modulo 3 frame sequence, whereby the above procedure is repeated.

The uplink procedure is reverse but otherwise identical to what was described above (in Figures 5A, 5B, 6A and 6B the arrows are changed in opposite directions). In other words, at each particular time the MS packs eight units of the information unit stream shown in Figure 6B in the uplink ra-

5 dio frames shown in Figure 6A and provides them with the phase indication of the invention. The base station BTS receives said uplink radio frames which are as shown in Figures 5B and 6A, and separates whole information units from them in the same way as was described above for the mobile station MS in the downlink direction. The BTS packs the separated information units into contents of E-TRAU frames, whereby uplink E-TRAU frames according to Figure 5A are obtained and sent to the network adapter IWF. Even though in Figures 5A, 5B, 6A and 6B, the information unit is the contents of an E-TRAU frame, the information unit may be composed of any information which is to be transmitted. In the GSM system, in non-transparent transmission this unit may be a frame in the radio link protocol (RLP). In transparent data transmission an information unit may be a V.110 frame or a group of several V.110 frames.

10 It is obvious to a person skilled in the art that as technology advances, the basic idea of the invention may be implemented in a variety of ways. The invention and its embodiments are therefore not restricted to the above examples, but may vary within the scope of the claims.

CLAIMS

1. A data transmission method in a digital telecommunication system, the method comprising the steps of
placing information units to be transmitted in frames of a lower
5 protocol in the transmission link,
transmitting the frames over the transmission link,
separating said information units from the frames received over the transmission link, **characterized** by
A) said placing step comprising the steps of
10 a1) providing said frames with phase indication, which is modulo N and defines a sequence of N frames,
a2) placing N1 information units in each modulo N frame sequence, wherein N1 is not equal to N,
B) said separating step comprising the steps of
15 b1) identifying the phase of each modulo N frame sequence and the starting points of the information units in the frames on the basis of said phase information,
b2) separating N1 information units from each modulo N frame sequence for further processing.
- 20 2. A method as claimed in claim 1, **characterized** by the telecommunication system being a wireless telecommunication system and the information units being transmitted in radio frames over the radio interface.
3. A method as claimed in claim 1 or 2, **characterized** by said phase indication comprising one of the following: a pseudo-noise code
25 spread over N radio frames; and a sequence number.
4. A method as claimed in claim 1, 2 or 2, **characterized** by coding the phase indication as protection against transmission errors.
5. A method as claimed in claim 1, 2, 3 or 4, **characterized** by said information unit being a transmission frame in which data is transmit-
30 ted over the network interface between a radio access network element and a network adapter.
6. A method as claimed in claim 1, 2, 3 or 4, **characterized** by said information unit being the information contents of a transmission frame transmitted over the network interface between a radio access network ele-
35 ment and a network adapter.

7. A method as claimed in claim 1, 2, 3 or 4, **characterized** by said information unit being a protocol data unit in an upper layer protocol.

8. A method as claimed in claim 7, **characterized** by said information unit being a protocol data unit, such as a radio link protocol frame, in a link protocol established between a mobile station and a network adapter.

9. A method as claimed in claim 6, **characterized** by said placing step comprising

a1) transmitting 38.4 kbit/s user data in 14.4 kbit/s transmission frames via three 16 kbit/s channels at the network interface, every ninth transmission frame being a dummy frame,

a2) providing 20-ms radio frames with phase indication which is modulo N, wherein $N > 3$,

a3) placing the information contents of N1 transmission frames in each modulo N radio frame sequence, wherein $N1 > 8$,

a4) placing filler bits at the end of the last radio frame N of each radio frame sequence,

said placing step comprising at the reception end the steps of

b1) identifying the phase of each modulo N radio frame sequence and the starting points of the transmission frames in the radio frames on the basis of said phase information,

b2) separating N1 transmission frames from each radio frame sequence for further processing,

b3) rejecting said filler information.

10. A method as claimed in any one of the preceding claims, **characterized** by

adding one or more filler bits to the frame sequence, preferably at the end of the last frame, if the bit number required by the N1 information units and phase information is smaller than the total number of information bits in the modulo N frame sequence,

rejecting said one or more filler bits at the reception end.

11. A method as claimed in any one of the preceding claims, **characterized** by a remote transcoder unit being arranged between the radio access network element and the network adapter at the network interface and the method comprising the additional steps of

using transmission frames of a first type between said element and the remote transcoder,

using transmission frames of a second type between the remote transcoder and the network adapter,

converting the transmission frames of the first type into transmission frames of the second type in the remote transcoder.

- 5 12. A digital mobile communication system comprising a mobile station (MS), a radio access network element, such as a base station (BTS), a radio interface using channel coding and radio frames between the mobile station and the radio access network element, means in the mobile station and said radio access network element for placing information units in radio frames to be transmitted, and means in the mobile station and said radio access network element for separating the information units from the received radio frames, **characterized** by

- A) the placing means comprising
means for providing said radio frames with phase indication (P1, P2), which is modulo N and defines a sequence of N radio frames,
15 means for placing N1 information units ($I_1 \dots I_{N1}$) in each modulo N radio frame sequence, wherein N1 is not equal to N,

- B) the separation means comprising
means for identifying the phase of each modulo N radio frame sequence and the starting points of the information units ($I_1 \dots I_{N1}$) in the radio frames on the basis of the phase information (P1, P2),
20 means for separating N1 information units ($I_1 \dots I_{N1}$) from each modulo N radio frame sequence for further processing.

13. A system as claimed in claim 12, **characterized** by said phase indication (P1, P2) comprising one of the following: a pseudo-noise code spread over N radio frames; and a sequence number.

14. A system as claimed in claim 12, 13 or 14, **characterized** by said information unit ($I_1 \dots I_{N1}$) being one of the following:

- a transmission frame in which data is transmitted over the network interface between the radio access network element (BTS) and a network adapter (IWF),
30

the information contents of a transmission frame transmitted over the network interface between the radio access network element (BTS) and the network adapter (IWF),

- 35 a protocol data unit in an upper layer protocol,
a protocol data unit, such as a radio link protocol frame, in a link

protocol established between the mobile station (MS) and the network adapter (IWF).

15. A system as claimed in claim 12, 13 or 14, **character-**
ized by the placing means being arranged to add said one or more filler bits
5 to the frame sequence, preferably at the end of the last frame, if the bit number required by the N1 information units and phase information is smaller than the total number of information bits in the modulo N frame sequence.

Fig. 1A

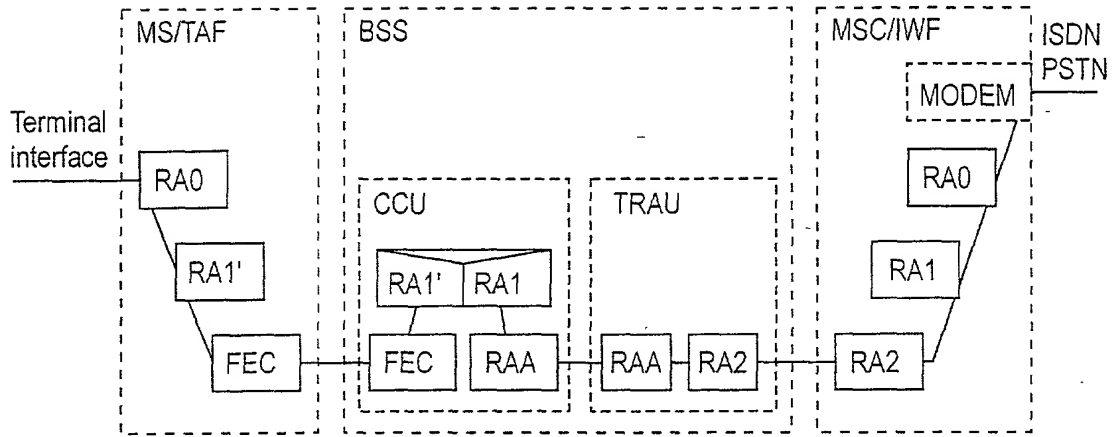


Fig. 1B

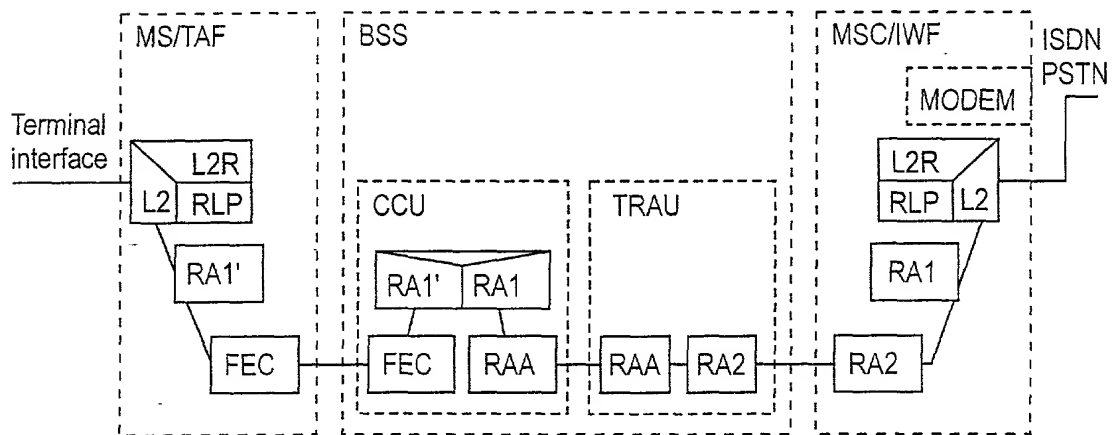


Fig. 2

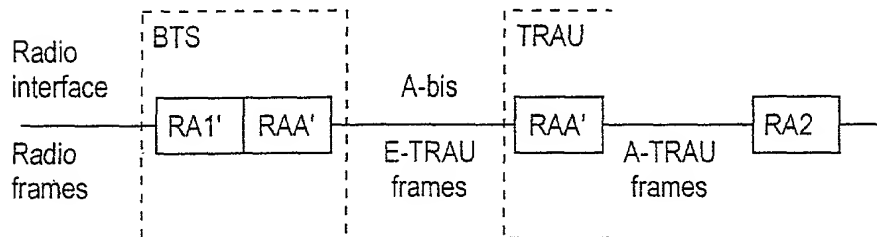


Fig. 3

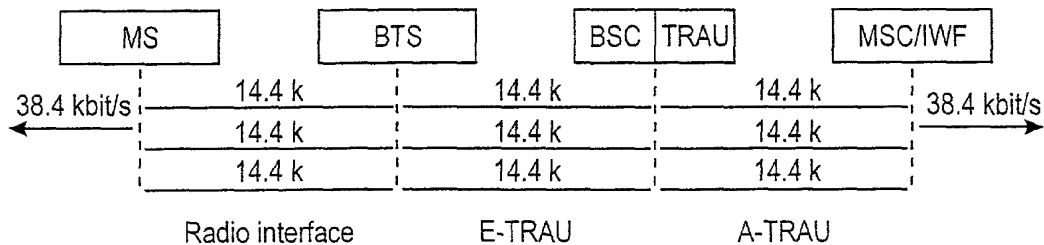


Fig. 4


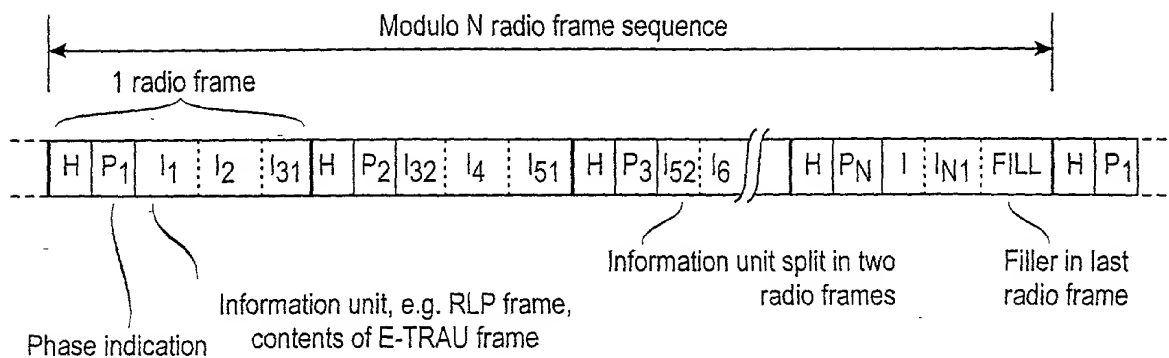


Fig. 5A

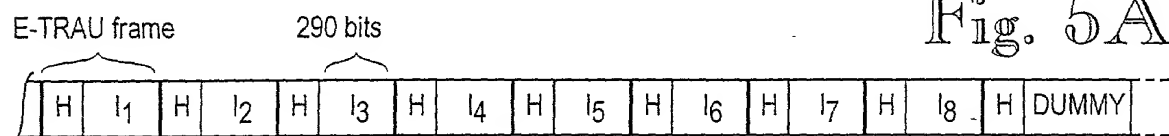


Downlink
E-TRAU
frames

BTS


Downlink
radio
frames

Fig. 5B

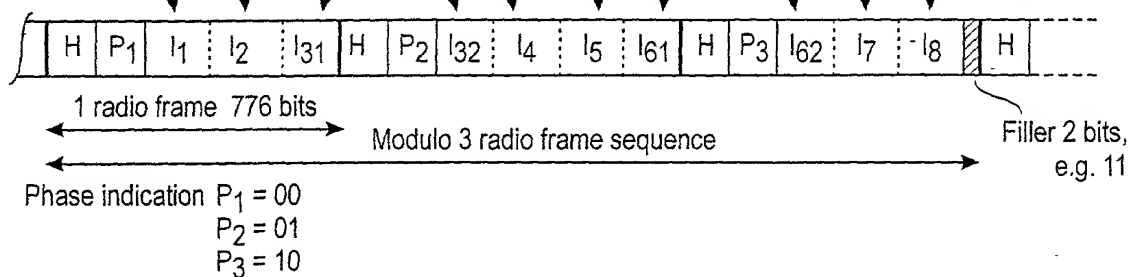


Downlink
radio frames

Fig. 6A



MS

Fig. 6B



FOR UTILITY/DESIGN
CIP/PCT NATIONAL/PLANT
ORIGINAL/SUBSTITUTE/SUPPLEMENTAL
DECLARATIONS

RULE 63 (37 C.F.R. 1.63)
DECLARATION AND POWER OF ATTORNEY
FOR PATENT APPLICATION
IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

PM & S
FORM

As a below named inventor, I hereby declare that my residence, post office address and citizenship are as stated below next to my name, and I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the INVENTION ENTITLED

DATA TRANSMISSION IN A TELECOMMUNICATION SYSTEM

the specification of which (CHECK applicable BOX(ES))

X → A. ☐ is attached hereto.
BOX(ES) → B. ☐ was filed on _____ as U.S. Application No. _____ /
→ C. ☒ was filed as PCT International Application No. PCT/FI99 /00660 on 9 August 1999

and (if applicable to U.S. or PCT application) was amended on _____

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above. I acknowledge the duty to disclose all information known to me to be material to patentability as defined in 37 C.F.R. 1.56. I hereby claim foreign priority benefits under 35 U.S.C. 119(a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT International Application which designated at least one other country than the United States, listed below and have also identified below any foreign application for patent or inventor's certificate, or PCT International Application, filed by me or my assignee disclosing the subject matter claimed in this application and having a filing date (1) before that of the application on which priority is claimed, or (2) if no priority claimed, before the filing date of this application:

PRIOR FOREIGN APPLICATION(S) Number	Country	Date first Laid- open or Published	Date Patented or Granted	Priority Claimed Yes No
981723	Finland	10 August 1998		X

I hereby claim domestic priority benefit under 35 U.S.C. 119(e) or 120 and 365(c) of the indicated United States applications listed below and PCT international applications listed above or below and, if this is a continuation-in-part (CIP) application, insofar as the subject matter disclosed and claimed in this application is in addition to that disclosed in such prior applications. I acknowledge the duty to disclose all information known to me to be material to patentability as defined in 37 C.F.R. 1.56 which became available between the filing date of each such prior application and the national or PCT international filing date of this application:

PRIOR U.S. PROVISIONAL, NONPROVISIONAL AND/OR PCT APPLICATION(S) Application No. (series code/serial no.)	Day/MONTH/Year Filed	Status pending, abandoned, patented	Priority Claimed Yes No
--	----------------------	--	----------------------------

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

And I hereby appoint Pillsbury Madison & Sutro LLP, Intellectual Property Group, 1100 New York Avenue, N.W., Ninth Floor, East Tower, Washington, D.C. 20005-3918, telephone number (202) 861-3000 (to whom all communications are to be directed), and the below-named persons (of the same address) individually and collectively my attorneys to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith and with the resulting patent, and I hereby authorize them to delete names/numbers below of persons no longer with their firm and to act and rely on instructions from and communicate directly with the person/assignee/attorney/firm/organization who/which first sends/sent this case to them and by whom/which I hereby declare that I have consented after full disclosure to be represented unless/until I instruct the above firm and/or a below attorney in writing to the contrary.

Paul N. Kokulis	16773	Dale S. Lazar	28872	Mark G. Paulson	30793	Michael R. Dzwonczyk	36787
Raymond F. Lippitt	17519	Paul E. White, Jr.	32011	Stephen C. Glazier	31361	W. Patrick Bengtsson	32456
G. Lloyd Knight	17698	Glenn J. Perry	28458	Paul F. McQuade	31542	Jack S. Barufka	37087
Carl G. Love	18781	Kendrew H. Colton	30368	Ruth N. Morduch	31044	Adam R. Hess	41835
Kevin E. Joyce	20508	G. Paul Edgell	24238	Richard H. Zaitlen	27248		
George M. Sirilla	18221	Lynn E. Eccleston	35861	Roger R. Wise	31204		
Donald J. Bird	25323	Timothy J. Klima	34852	Jay M. Finkelstein	21082		
Peter W. Gowdey	25872	David A. Jakopin	32995	Anita M. Kirkpatrick	32617		

(1) INVENTOR'S SIGNATURE:

Date: 05/01/2001

First	Middle Initial	Family Name
Juha		RÄSÄNEN
Residence	Espoo	Finland
City	State/Foreign Country	Country of Citizenship
Post Office Address	Pensaskertuntie 8 A, FIN-02660 Espoo, Finland	
(include Zip Code)		

(2) INVENTOR'S SIGNATURE:

Date:

First	Middle Initial	Family Name
Residence		
City	State/Foreign Country	Country of Citizenship
Post Office Address		
(include Zip Code)		

(FOR ADDITIONAL INVENTORS, check box ☐ to attach PAT 116-2 same information for each re signature, name, date, citizenship, residence and address.)